

# DART SERVICE BULLETIN SB10-6


## AFFECTING:

D350-561-141 SINGLE MIRROR INSTALLATION AT CHANGE 002 OR EARLIER  
D350-561-143 DUAL MIRROR INSTALLATION AT CHANGE 002 OR EARLIER

REF FAA STC: SH856NE  
REF TCCA STC: SH91-20  
REF EASA STC EASA.IM.R.S.01516

For D350-561-141/-143 mirror kits, the MS21919WDG7 clamps have been replaced with stonger D4070-041 clamps. For customers with D350-561-141/-143 mirror kits at change 002 or earlier, it is recommended that the MS21919WDG7 clamps be replaced with D4070-041 clamps.

The DSI-9379-013 kit is available from DART to upgrade affected installations. Please see Dart Service Instruction **DSI 9379 Rev. C** (or later revision) for further information.

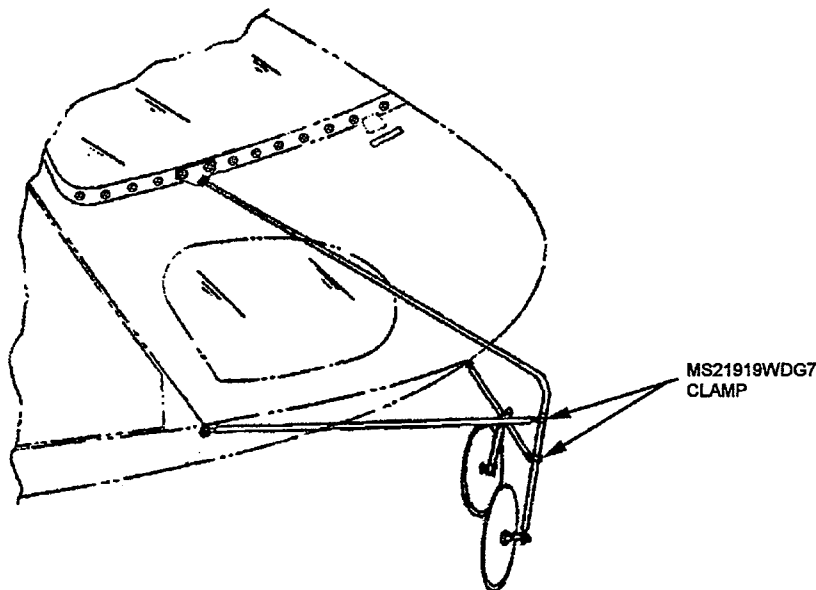

**FIGURE 1**

D350-561-143 DUAL MIRROR INSTALLATION (SHOWN)  
D350-561-141 SINGLE MIRROR INSTALLATION (SIMILAR)

A	NEW ISSUE	CP	10.07.07
REV.	DESCRIPTION	BY	DATE
DESIGN	92	<b>DART AEROSPACE LTD</b>	
DRAWN	92	HAWKESBURY, ONTARIO, CANADA	
CHECKED	92	DRAWING NO.	REV. A
MFG. APPR.	N/A	SB10-6	SHEET 1 OF 1
APPROVED	WD	TITLE	SCALE
DE APPR.	HA	SERVICE BULLETIN	NTS
DATE	10.07.07	COPYRIGHT © 2010 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	